

**ADDENDUM #6**

**Project Name:** Gull River Development

**Quotation No:** RFQ 2025-11 KLHHC Gull River


**Date:** April 15, 2025

**This addendum forms part of the contract documents and is to be read, interpreted and coordinated with all other parts. The following revisions or clarifications supersede the information contained in the original Quotation document.**

**This addendum must be acknowledged emailing the "Acknowledgement of Receipt of Addendum". Failure to do so may result in the bid being disqualified.**

**CIVIL WATER SERVICE CLARIFICATION**

1. 63mm water service pipe to be replaced with 50mm Municipex.
2. Check valve and associated structure along the force main to be removed. The check valves are incorporated into the lift station. See attachment "250415 – GULL RIVER HOUSING – LIFT STATION.pdf" for detail.

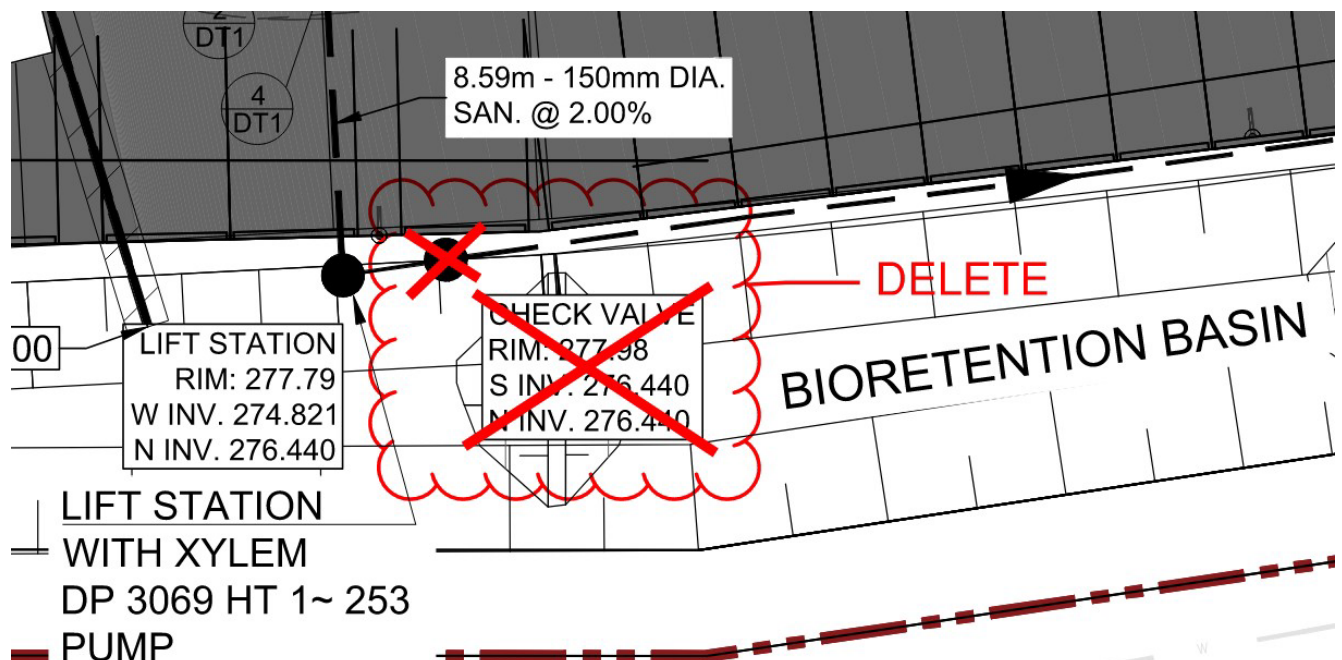

### CONCRETE SIDEWALKS AND CURBS

1. On architectural drawing 4-A104 100mm concrete sidewalks to be replaced with 150mm as shown in attachment "OPSD 310.010 Rev#3 Nov19.pdf"
2. For precast concrete curbs detail, see attachment "OPSD603.020 Rev#2 Nov2012.pdf"

**If you have any questions, please contact:  
Don Quibell (dquibell@kawarthalakes.ca)  
1-705-324-6401 ext.3133 (OFFICE)**

**END OF ADDENDUM**

**ADDENDUM #6 OF 6, DATED April 15, 2025**